


(13)

Betrachte Massepunkt m_i

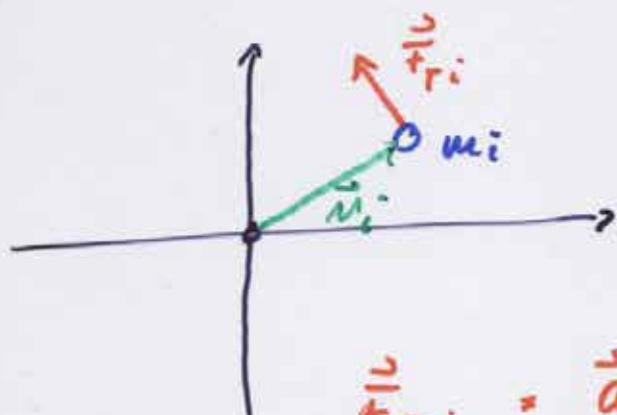

$$\begin{aligned}\vec{f}_{r_i} &= \vec{a}_T \cdot m_i \\ \Rightarrow a_T &= \frac{\vec{f}_{r_i}}{m_i} = \alpha \cdot n_i\end{aligned}$$


$$\begin{aligned}\text{Drehmoment: } M_i &= m_i \vec{f}_i \\ &= \underbrace{m_i n_i}_{J_i} n_i \alpha\end{aligned}$$

[engl: torque]

$$\begin{aligned}& J_i \\ &= J_i \alpha\end{aligned}$$

$$\text{Allgemein: } \vec{M} = J \cdot \vec{\alpha}$$

Demo

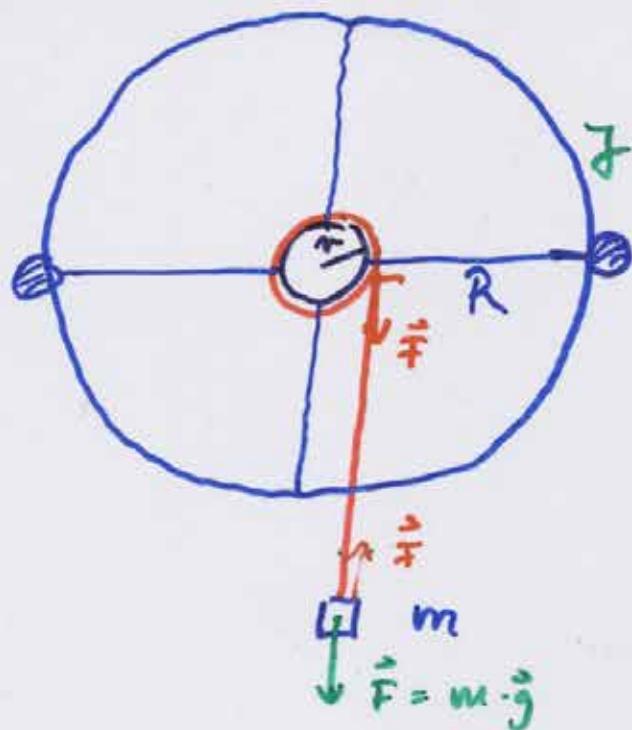

$$\begin{cases} \vec{N} = \vec{v} \times \vec{F} = \vec{j} \cdot \vec{\omega} \\ m \cdot \vec{g} - \vec{F} = m \cdot \vec{a} \end{cases}$$

In Komponenten: $N = m \cdot F = j \cdot \alpha$
 $mg - F = m \cdot a$

$$\Rightarrow mg - \frac{j}{r^2} a = m \cdot a$$

$$[a = \frac{\alpha}{r}]$$

$$\Rightarrow a = \frac{g}{1 + \frac{j}{mr^2}}$$

Überprüfung des Ergebnisses:

$$\begin{array}{lll} m \rightarrow \infty & \Rightarrow & a \rightarrow g \\ m \rightarrow 0 & \Rightarrow & a \rightarrow 0 \\ \gamma \rightarrow \infty & \Rightarrow & a \rightarrow 0 \\ \gamma \rightarrow 0 & \Rightarrow & a \rightarrow g \end{array}$$

Bewegungsgleichung:

$$\alpha = \frac{g/N}{1 + \gamma/mv^2}$$

$$\text{für } \gamma \gg m v^2 : \alpha \approx \frac{m \cdot g \cdot N}{\gamma}$$

$$\begin{aligned} \theta(t) &= \frac{1}{2} \alpha t^2 \\ &= \frac{1}{2} \frac{mgN}{\gamma} t^2 \end{aligned}$$

Demo = für $m = 0,5 \text{ kg}$:


2 Umdrehungen $\hat{=} 8s$

für $m = 1 \text{ kg}$:

4 Umdrehungen $\hat{=} 7,8s$

$$\left(\theta \sim \frac{m}{N} \right)$$

Anwendung: Drehschwingungen

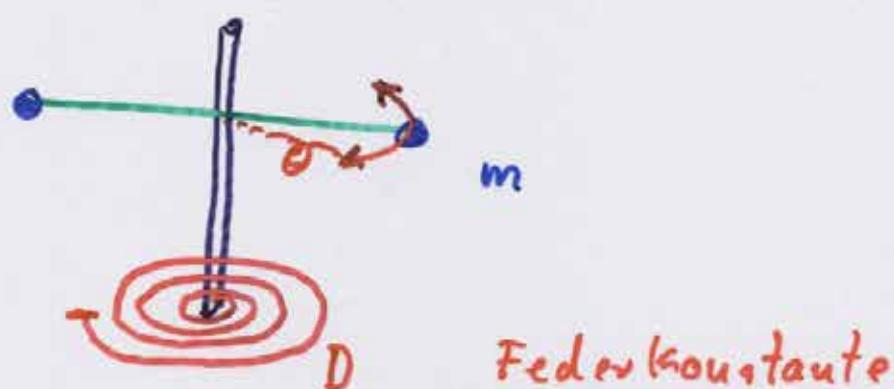

$$\text{Federkraft} \Rightarrow M = D \cdot \theta$$

$$= J \alpha$$

$$= J \cdot \frac{d^2\theta}{dt^2}$$

$$J \cdot \frac{d^2\theta}{dt^2} = -D \cdot \theta$$

$$\text{Ausatz: } \theta(t) = \Theta_0 \cos(\omega t + \phi)$$

$$\Rightarrow \omega = \sqrt{\frac{D}{J}}$$

$$T = 2\pi \sqrt{\frac{J}{D}}$$


$$\text{Bz: } J = 2m r^2$$

$$\Rightarrow \frac{T_1}{T_2} = \frac{n_1}{n_2} \approx \frac{25}{46} \approx \frac{1}{2}$$


4] Arbeit, Energie

Lineare Dynamik:

$$A = \int_{\vec{s}_1}^{\vec{s}_2} \vec{F} d\vec{s}$$

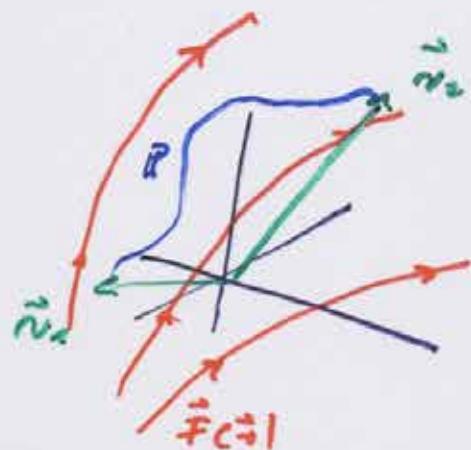

Rotation:

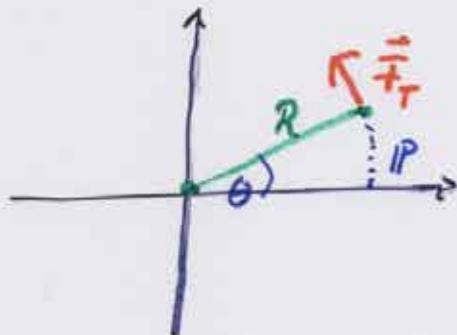

$$A = \int \vec{F}_T \cdot R d\theta$$

$$= \int \vec{M} d\theta$$

Rotationsarbeit

Für beschleunigte Rotation:

$$\vec{M} = J \cdot \vec{\alpha} \neq 0$$

$$A = \int_{\theta_1}^{\theta_2} \vec{M} d\theta = \int_{\theta_1}^{\theta_2} J \vec{\alpha} d\theta = \int_{\theta_1}^{\theta_2} J \frac{d\vec{\omega}}{dt} d\theta$$

$$\dots = \int_{\omega_1}^{\omega_2} J \cdot \bar{\omega} d\bar{\omega}$$

$$= \frac{1}{2} J \omega_2^2 - \frac{1}{2} J \omega_1^2$$

$$= \Delta E_{\text{rot}}$$


Allgemein : Energiesatz / Energieerhaltungssatz :

$$E_{\text{tot}} = E_p + E_k + E_R (+ E_{\text{int}})$$

$$= \text{const.}$$

Anwendung :

1)

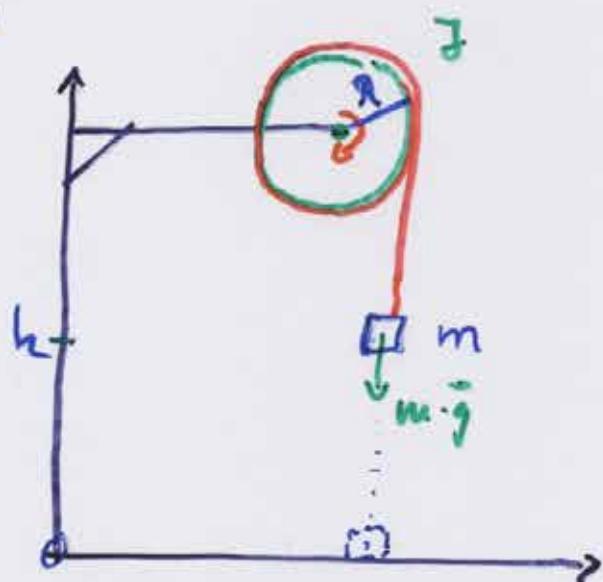

$$\text{a). } E_{\text{tot}} = m \cdot g \cdot h$$

$$= 0 + \frac{1}{2} m v^2 + \frac{1}{2} J \omega^2$$

$$\text{mit } \omega = \frac{v}{R} :$$

$$mg h = \frac{1}{2} m v^2 + \frac{1}{2} J \frac{v^2}{R^2}$$

$$\Rightarrow v = \sqrt{\frac{2 \cdot m \cdot g \cdot h}{m + J/R^2}}$$

Test: $m \rightarrow \infty$: $v \rightarrow \sqrt{2gh}$ ✓
fallgeschwind.

$m \rightarrow 0$: $v \rightarrow 0$ ✓


$J \rightarrow 0$: $v \rightarrow \sqrt{2gh}$ ✓

$J \rightarrow \infty$: $v \rightarrow 0$ ✓

$m \rightarrow 0, J \rightarrow 0$: $v \rightarrow \sqrt{2gh}$ ✓

Zu: Anwendungen

[2] : Yoyo

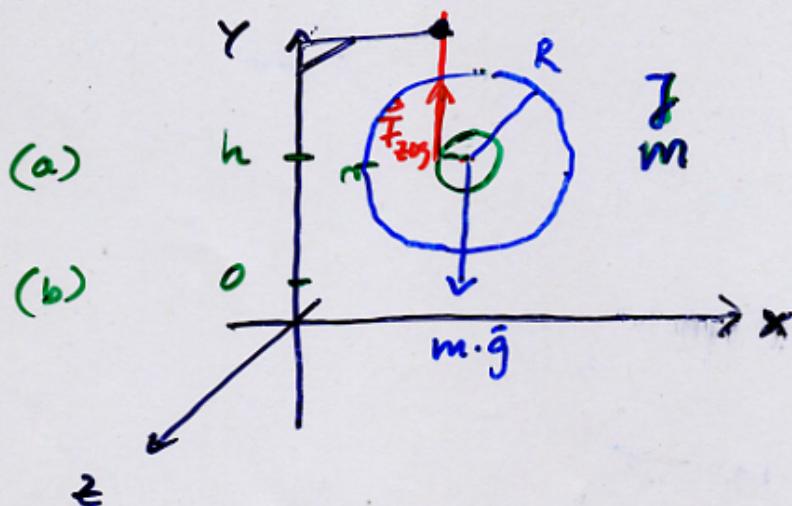

Energiebetrachtung

$$(a) E_{\text{tot}} = m \cdot g \cdot h$$

$$= \frac{1}{2} m v^2 + \frac{1}{2} J \omega^2$$

$$(b) \Rightarrow v = \sqrt{\frac{c g h}{1 + \frac{J}{m v^2}}} \quad v = \omega \cdot R$$

Kräftebetrachtung

$$\sum \vec{M}_i = \vec{n} \times \vec{F}_{\text{zug}} = J \alpha^2$$

$$\sum \vec{F}_i = m \vec{g} + \vec{F}_{\text{zug}} = m \cdot \vec{a}$$


$$y\text{-Richtung: } -mg + F_{\text{zug}} = -ma$$

$$z\text{-Richtung: } -n \cdot F_{\text{zug}} = -J\alpha$$


$$\text{Auch: } \alpha = \frac{a}{R}$$

$$\Rightarrow F_{\text{zug}} = \frac{J \cdot a}{m R^2} \Rightarrow a = \frac{J}{1 + \frac{J}{m v^2}}$$

4) Kugeln / Bowling

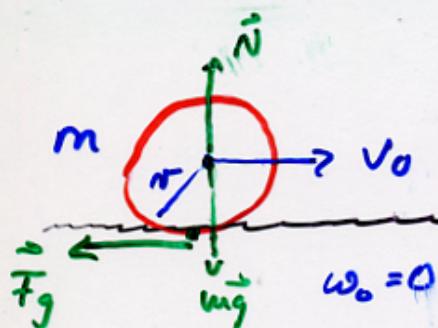

Gleitreibung

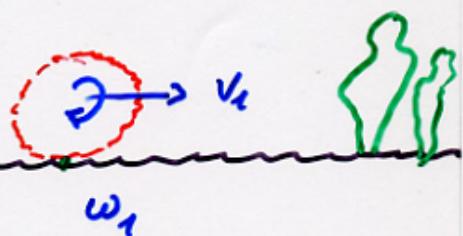

Haftriebung

$$(a) E_{tot} = \frac{1}{2} m v_0^2 \\ = \frac{1}{2} m v_1^2 + \frac{1}{2} J \omega_1^2 + E_{int}$$

$$(b) F_g = m a = \mu \cdot \frac{v_1 - v_0}{\Delta t}$$

$$M = r \cdot F_g = J \cdot \alpha = J \cdot \frac{\omega_1 - \omega_0}{\Delta t}$$

$$\Rightarrow M = m \cdot \frac{v_1 - v_0}{\Delta t} \cdot r = J \cdot \frac{v_1}{r \cdot \Delta t}$$

$$\Rightarrow v_1 = \frac{v_0}{1 + \frac{J}{m r^2}}$$

$$\text{Für Vollkugel: } J = \frac{2}{5} m r^2$$

$$v_1 = v_0 \cdot \frac{5}{7}$$